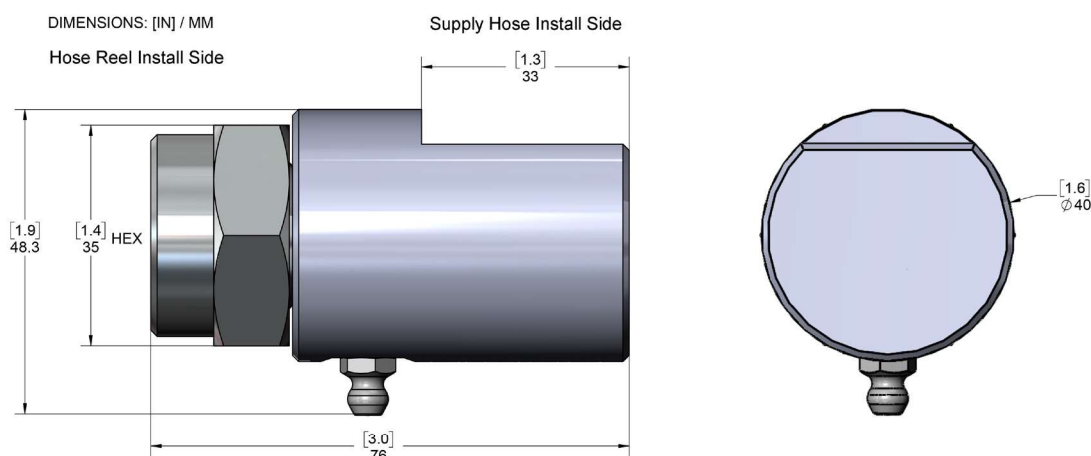


GENERAL PUMP *A member of the Interpump Group*

Swivel Coupling

Stainless Steel**SPECIFICATIONS**

Part Number	DSW9038SS	DSW9012SS
Port Size	3/8" NPT-18	1/2" NPT-14
Max. Pressure	5,000 PSI	5,000 PSI
Max. Temp	250° F	250° F
Through Hole	1/2"	1/2"
Dimensions	3" x Ø1.6"	3" x Ø1.6"
Weight	17.5 oz	17.5 oz
Materials	Stainless Steel, XNBR, Teflon	

DIMENSIONS**Notes:**

1. Use only silicone grease
2. Do not over grease

WARNINGS

WARNING: High Pressure Systems require a primary pressure regulating device (i.e. regulator, unloader) and a secondary pressure relief device (i.e. pop-off valve, relief valve). Failure to install such relief devices properly could result in personal injury or damage to pump or property.

GP does not assume any liability or responsibility for the operation of the user's high pressure system.

During use, never exceed the maximum values of pressure, flow rate and temperature as stated in this document.

Maintenance and repair must be carried out by qualified and authorized staff only. Note: This product is not serviceable.

From time to time, it is necessary to check that the parts which are under pressure do not show cracks and/or leakages; the frequency of this check depends on the actual use.



General Pump
is a member of
the Interpump Group

GENERAL PUMP 1174 Northland Drive • Mendota Heights, MN 55120
Phone: 651.686.2199 • Fax: 800.535.1745 • e-mail: sales@gpcompanies.com • www.generalpump.com

Ref 310111 Rev. E
01-22

