

GENERAL PUMP *A member of the Interpump Group***YU5075K****Pressure Trapping Unloader****SPECIFICATIONS**


Part Number	YU5075K	
Operating Pressure	5,100 PSI	
Max Pressure	5,650 PSI	
Max Flow	10.5 GPM	
Temperature	195° F	
Port Sizes:	Inlet	3/8" BSP-M
	Discharge	3/8" BSP-F
	Bypass	1/2" BSP-F
Dimensions	3.6" x 1.4" x 5.3"	
Weight	2.0 lbs.	
Materials	Brass, Stainless Steel, Buna-N	

FEATURES

- Premium pressure compensated unloader for low spike pressures.
- Adjustable maximum pressure settings
- Stainless Steel internal components for maximum durability

PARTS LIST

No.	Part No.	Description	Qty.
1	Y60181131	Fitting, 3/8 BSP-F	1
2	Y10306601	O-ring, 1.78 x 15.6 mm	2
3	Y60005351	Spring	1
4	Y60005251	Check Valve, SS	1
5	Y10321308	O-ring, 3 x 6 mm	1
6	Y60172535	Valve Body	1
7	Y60180951	Seat	1
8	Y60180851	Shutter, M8	1
9	Y10306801	O-ring, 1.78 x 17.17 mm	1
10	Y60181031	Spacer	1
11	Y60097924	Piston Valve Seal Kit	1
12	Y10307201	O-ring, 1.78 x 20.35 mm	1
13	Y60180531	Piston Housing	1
14	Y16210000	Dowel, M4 x 4 mm	1
15	Y60172831	Lock Ring	1
16	Y60097824	Piston Seal Kit	1
17	Y60180651	piston, M8	1
18	Y14744310	Ball, 11/32", SS	1
19	Y60181331	Spring Guide	1
20	Y60181261	4.5 x 47 mm	1
21	Y60172731	Brass Cap	1
22	Y60172984	Red Plastic Cap	1
*	Y60161524	Repair Kit	

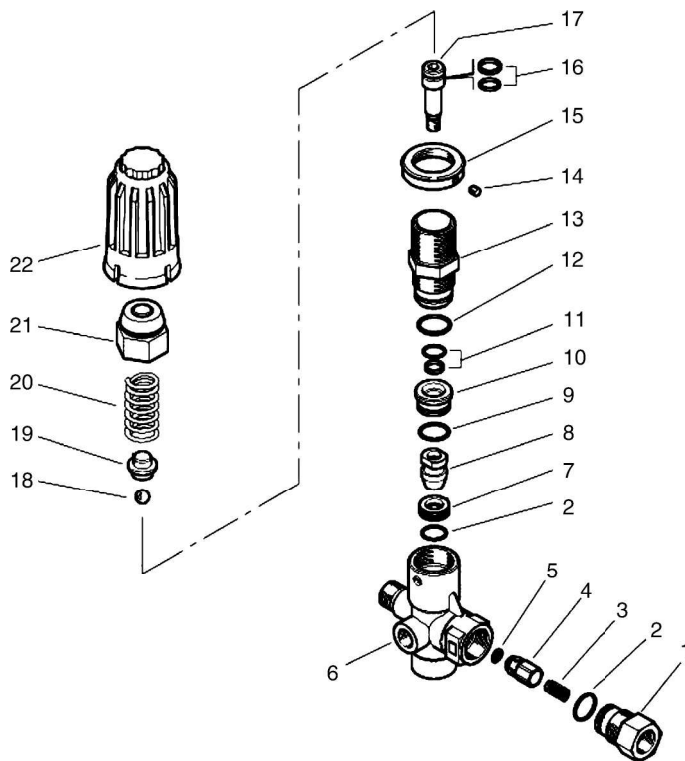

General Pump
is a member of
the Interpump Group



GENERAL PUMP 1174 Northland Drive • Mendota Heights, MN 55120
Phone: (651)454-6500 • Fax: (651)454-4524 • e-mail: sales@gpcompanies.com • www.generalpump.com

Ref 300493 Rev. C
02-19

