



Customer information packet

EM2513T

15HP, 1765RPM, 3PH, 60HZ, 254T, 3948M, OPSB, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	CSA EEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	36.400 A @ 230.0 V 39.000 A @ 208.0 V 18.200 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	U
Type	AC
Mech. spec.	39K57
Base	
Status	PRD/A
Elec. spec.	39WGY375
Layout	39LYK057
Eff. date	11-27-2023
CD Diagram	CD0180
Poles	04
Leads	9#12
Proprietary	False
Created date	06-30-2017

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	18.2 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3948M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	23.19 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554LUA											
CAT.NO.	EM2513T			P/N						ENCL	OPSE
SPEC.	39K057Y375		CC	010A		FRAME		254T		SER.NO.	
HP	15			CLASS		F		HZ	60		
RPM	1770			PH	3		DES		A		
VOLTS	230/460				CODE		J		ODE BRG	6208	DE BRG 6309
AMPS	36.4/18.2			USABLE AT 208V					N/A		
RATING	40C AMB-CONT			NEMA-NOM-EFF				93		GREASE	POLYREX EM
PF	83	SER.F.	1.15			CT30-60(2:1) VT3-60(20:1)					
USABLE AT	50HZ 15HP 190/380V 44/22A				SF 1.0						
HTR-VOLTS	HTR-AMPS		MAX. SPACE HEATER TEMP.								

Accessories

Part number	Description	Multiplier
39-3400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 93498

Typical performance - not guaranteed values

Winding: 39WGY375-R001				Type: 3948M		Enclosure: OPSB		
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		15		Full Load Torque		44.57 LB-FT		
Volts		230/460		Start Configuration		direct on line		
Full Load Amps		36/18		Breakdown Torque		171 LB-FT		
R.P.M.		1770		Pull-up Torque		79.1 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		100 LB-FT		
NEMA Design Code		A	KVA Code	J		Starting Current		137 A
Service Factor (S.F.)		1.15		No-load Current		7.62 A		
NEMA Nom. Eff.		93	Power Factor	83		Line-line Res. @ 25°C		0.5794 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		29°C		
S.F. Amps				Temp. Rise @ S.F. Load		35°C		
				Locked-rotor Power Factor		32.8		

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	45	68	78	83	86	87	85
Efficiency	88.6	92.6	93.3	93.1	92.5	91.7	92.7
Speed	1794.2	1788	1781.2	1773.7	1766.3	1758.2	1769
Line amperes	8.77	11.2	14.5	18.2	22.1	26.4	20.5


ABB Motors and Mechanical Inc.


WINDING # 39WGY375

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 1770 RPM 460 V 3948M

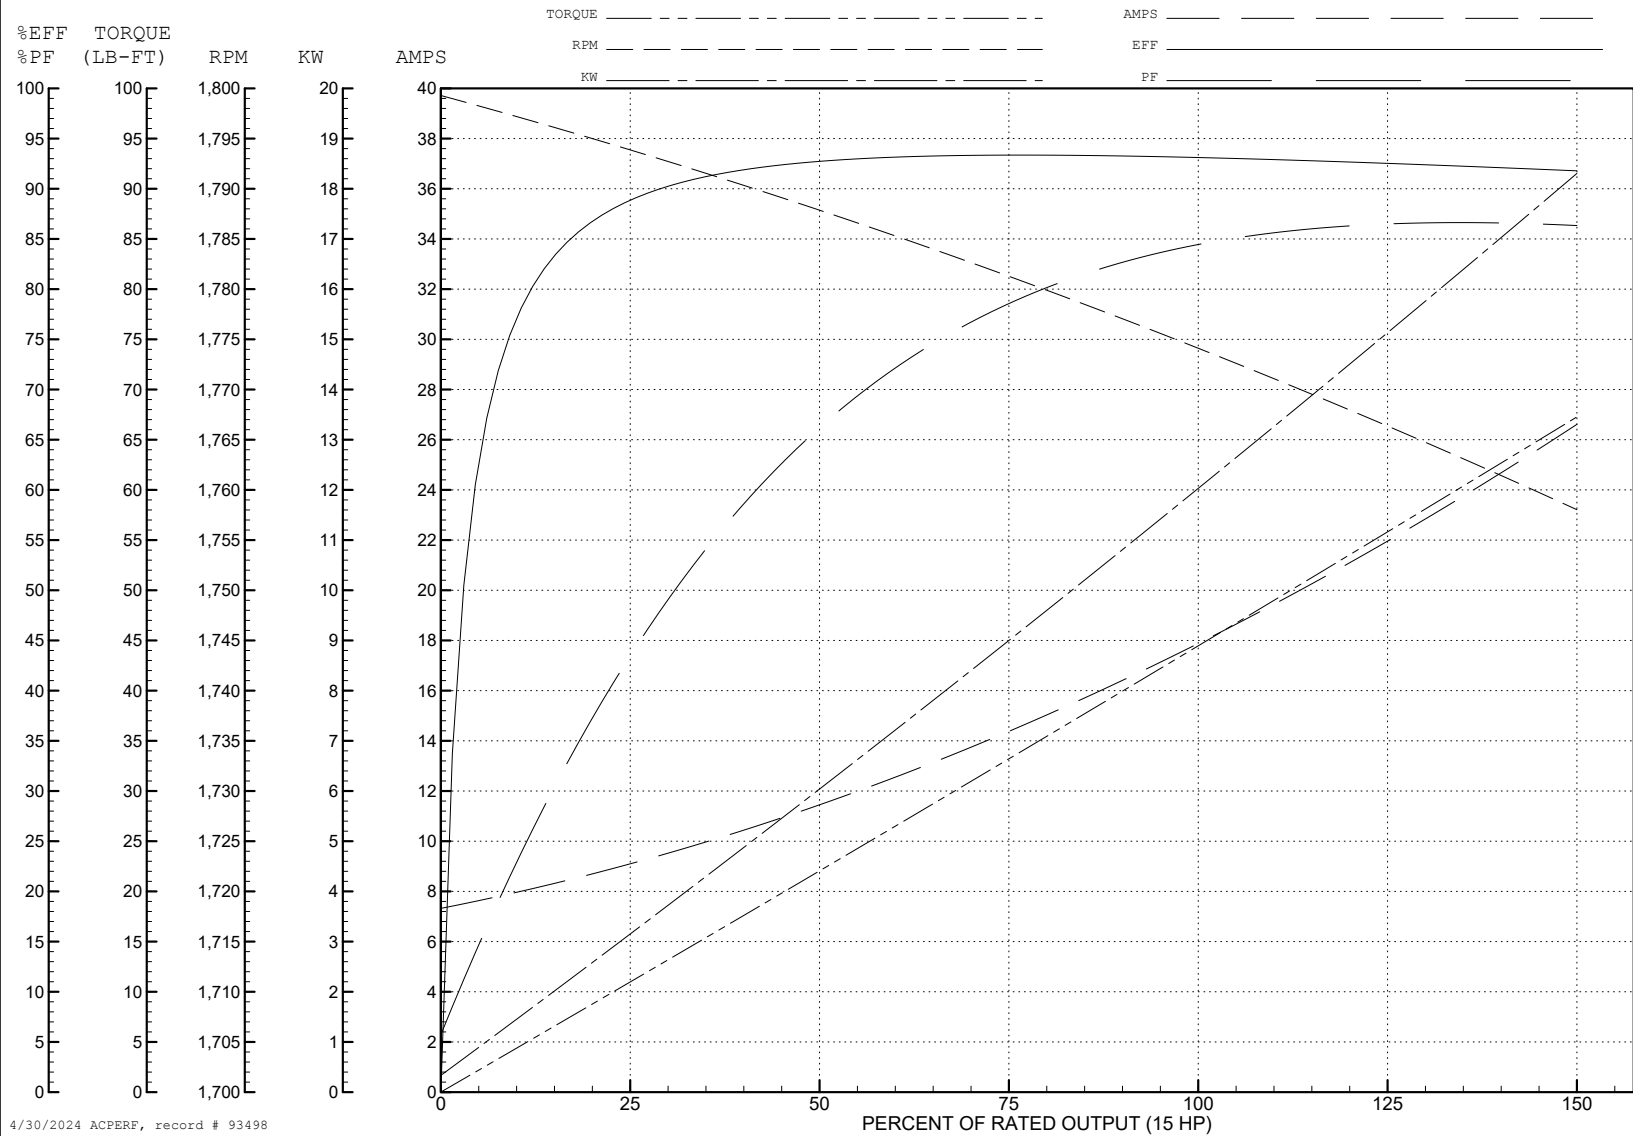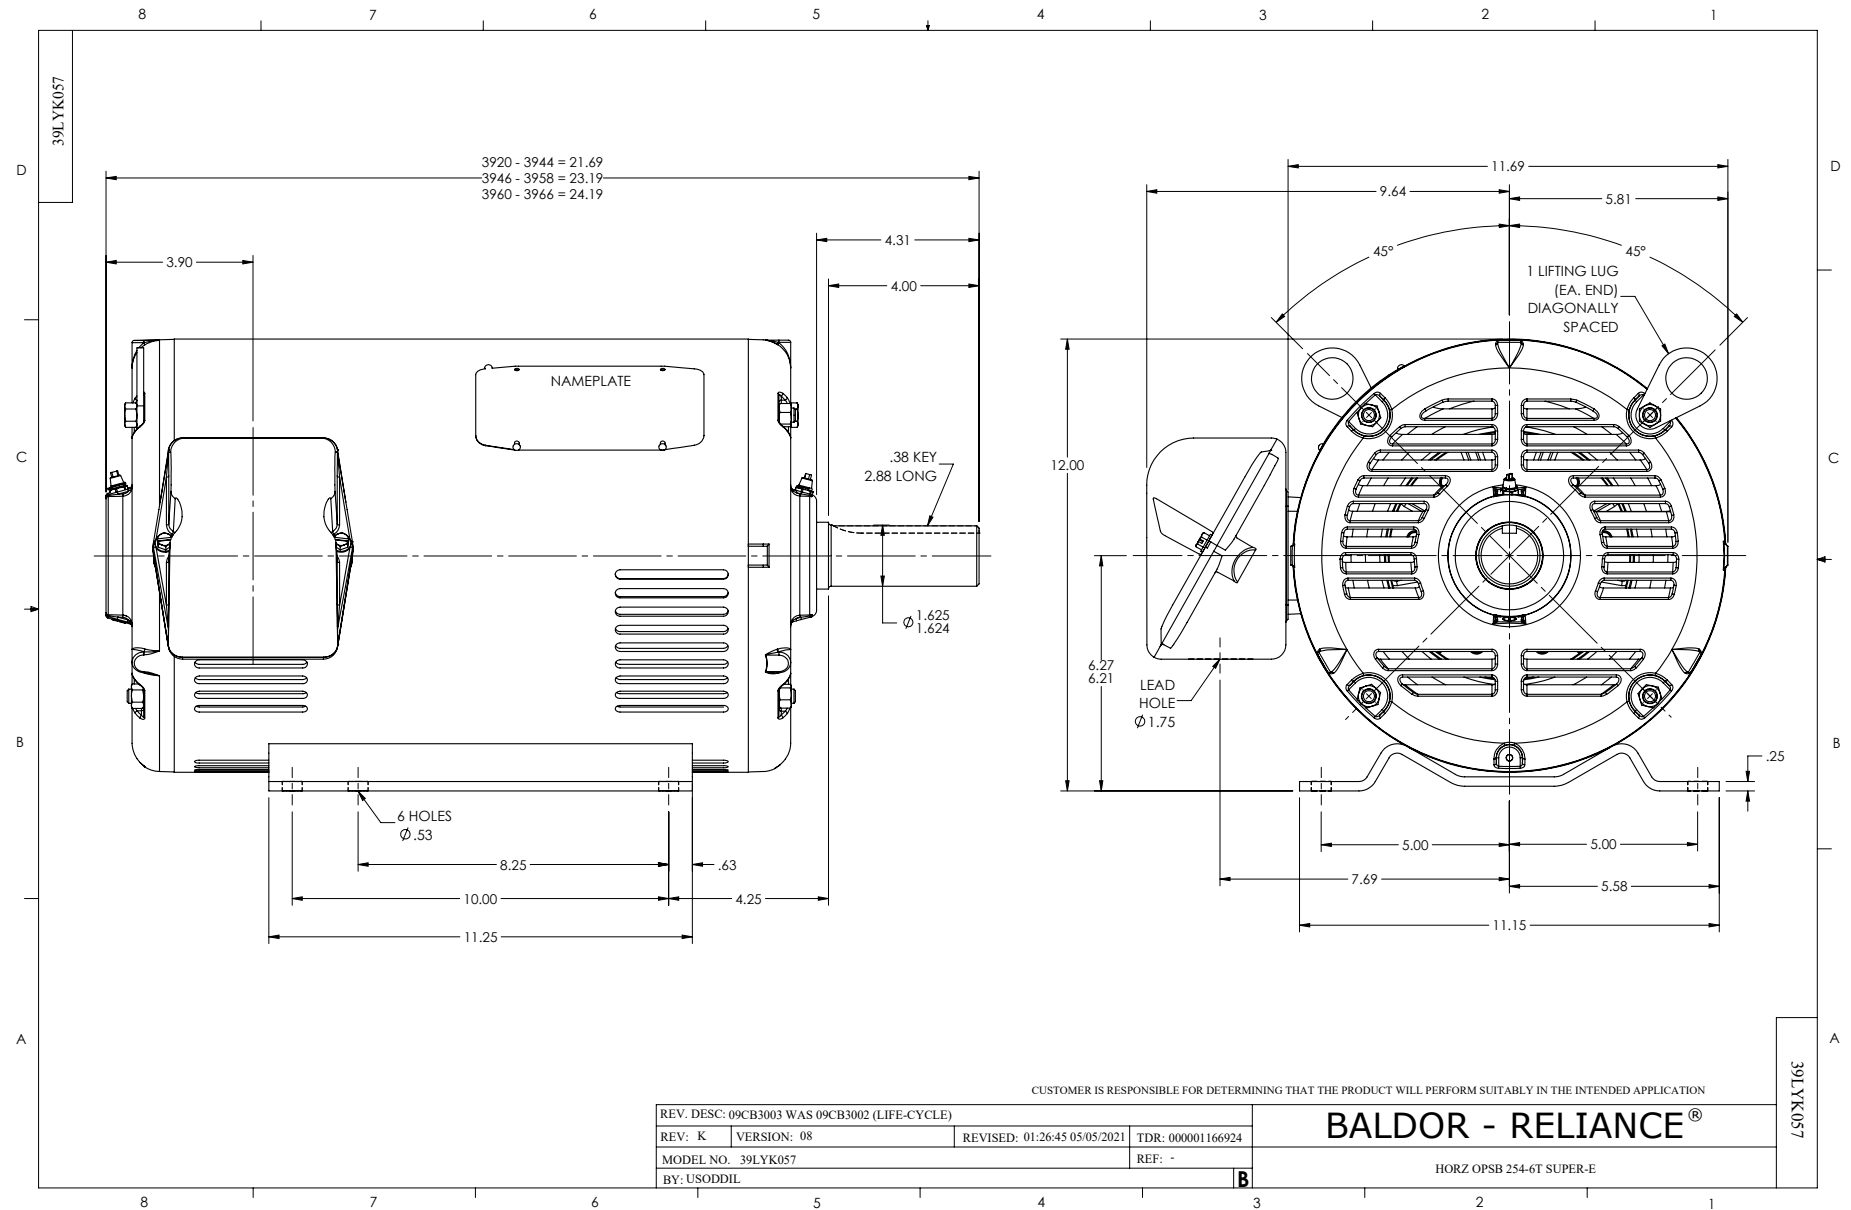TORQUES (LB-FT): PO=171 PU=79.1 LR=100 LRA=137





CD0180

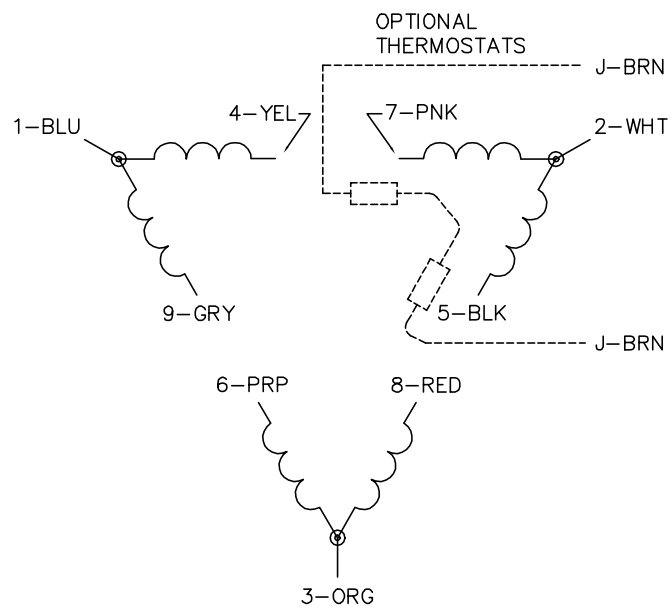LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1